


Eclisse CIRCULAR podwójna

wersja do ŚCIANY MUROWANEJ

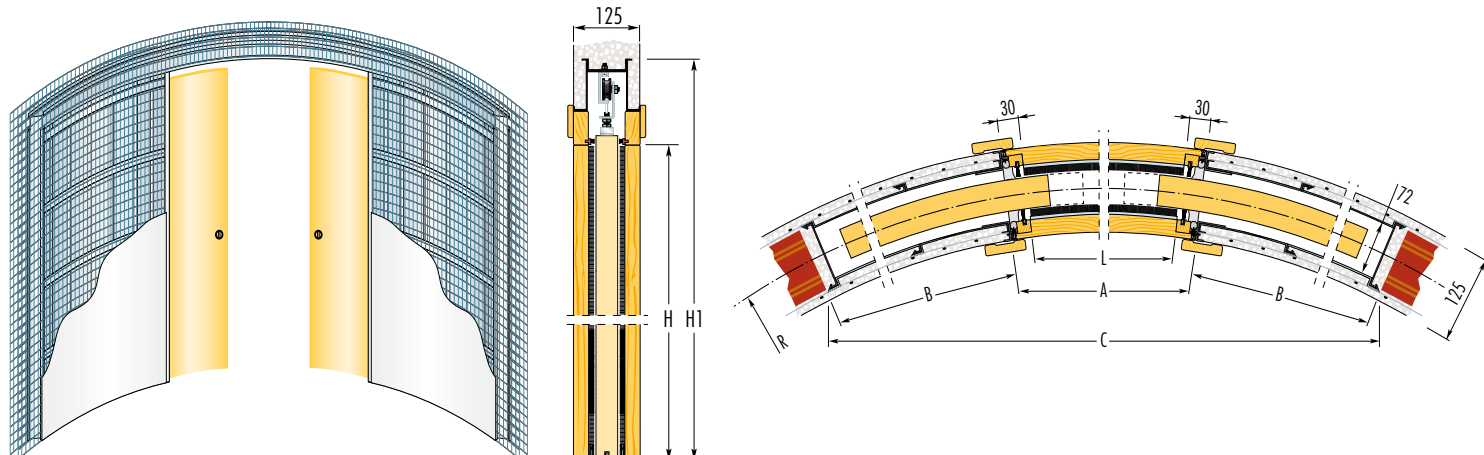

WYMIARY KASET STANDARDOWYCH

UWAGA

PROMIĘŃ R	ŚWIATŁO PRZEJŚCIA L x H	WYMIARY ZEWNĘTRZNE C x H1		GRUBOŚĆ ŚCIANY	WYMIARY WEWNĘTRZNE	
		AB				
1000	1200 x 2000/2100	1260	695	125		72
	1400 x 2000/2100	1460	820	125		72
1200	1200 x 2000/2100	1260	665	125		72
	1400 x 2000/2100	1460	800	125		72
	1600 x 2000/2100	1660	930	125		72
	1800 x 2000/2100	1860	1055	125		72
1300	1200 x 2000/2100	1260	670	125		72
	1400 x 2000/2100	1460	760	125		72
	1600 x 2000/2100	1660	895	125		72
	1800 x 2000/2100	1860	1025	125		72
	2000 x 2000/2100	2060	1150	125		72
1500	1200 x 2000/2100	1260	680	125		72
	1400 x 2000/2100	1460	770	125		72
	1600 x 2000/2100	1660	910	125		72
	1800 x 2000/2100	1860	1000	125		72
	2000 x 2000/2100	2060	1130	125		72
1700	1200 x 2000/2100	1260	640	125		72
	1400 x 2000/2100	1460	780	125		72
	1600 x 2000/2100	1660	870	125		72
	1800 x 2000/2100	1860	965	125		72
	2000 x 2000/2100	2060	1100	125		72
1800	1200 x 2000/2100	1260	640	125		72
	1400 x 2000/2100	1460	780	125		72
	1600 x 2000/2100	1660	875	125		72
	1800 x 2000/2100	1860	970	125		72
	2000 x 2000/2100	2060	1105	125		72
2000	1200 x 2000/2100	1260	645	125		72
	1400 x 2000/2100	1460	785	125		72
	1600 x 2000/2100	1660	880	125		72
	1800 x 2000/2100	1860	975	125		72
	2000 x 2000/2100	2060	1070	125		72

Wymiary niestandardowe:
maksymalna szerokość
skrzydła do 1200 mm,
wysokość 2400 mm.

Max. waga skrzydła do
80 kg..

Eclisse CIRCULAR podwójna

wymiary podano w mm..